



**PROFİL AKSESUARLARI**




**SANAYİ VE TİCARET LİMİTED ŞİRKETİ**

# STANDART PROFİLLER

Sistem özellikleri ve teknik veriler

# STANDART PROFİLLER

## Standart L Profiller




| Profil No | a<br>(mm) | b<br>(mm) | s1<br>(mm) | s2<br>(mm) | (kg/m) |
|-----------|-----------|-----------|------------|------------|--------|
| T 543-1.5 | 12        | 12        | 1.5        | 1.5        | 0.105  |
| T 522-1.5 | 15        | 15        | 1.5        | 1.5        | 0.116  |
| T 522-3   | 15        | 15        | 3.0        | 3.0        | 0.217  |
| T 519-2   | 20        | 12        | 2.0        | 2.0        | 0.165  |
| T 538-1.5 | 20        | 15        | 1.5        | 1.5        | 0.135  |
| T 500-1.2 | 20        | 20        | 1.2        | 1.2        | 0.125  |
| T 500-1.5 | 20        | 20        | 1.5        | 1.5        | 0.160  |
| T 500-2   | 20        | 20        | 2.0        | 2.0        | 0.205  |
| T 502-1.2 | 25        | 25        | 1.2        | 1.2        | 0.160  |
| T 502-3   | 25        | 25        | 3.0        | 3.0        | 0.382  |
| T 518-2   | 30        | 12        | 2.0        | 2.0        | 0.216  |
| T 507-1.2 | 30        | 20        | 1.2        | 1.2        | 0.170  |
| T 507-2   | 30        | 20        | 2.0        | 2.0        | 0.260  |
| T 501-1.2 | 30        | 30        | 1.2        | 1.2        | 0.195  |
| T 501-2   | 30        | 30        | 2.0        | 2.0        | 0.313  |
| T 533-3   | 30        | 87        | 3.0        | 3.0        | 0.940  |
| T 516-3   | 40        | 12        | 3.0        | 3.0        | 0.400  |
| T 503-1.2 | 40        | 20        | 1.2        | 1.2        | 0.195  |
| T 503-2   | 40        | 20        | 2.0        | 2.0        | 0.313  |
| T 503-2.5 | 40        | 20        | 2.5        | 2.5        | 0.387  |
| T 505-2   | 40        | 40        | 2.0        | 2.0        | 0.421  |
| T 505-4   | 40        | 40        | 4.0        | 4.0        | 0.820  |
| T 527-2   | 45        | 45        | 2.0        | 2.0        | 0.480  |
| T 530     | 46        | 30        | 1.2        | 2.0        | 0.310  |
| T 526     | 48        | 30        | 2.0        | 2.0        | 0.412  |
| T 351-1.8 | 50        | 25        | 1.8        | 1.8        | 0.360  |
| T 372-2   | 50        | 25        | 2.0        | 2.0        | 0.395  |
| T 351-2.3 | 50        | 25        | 2.3        | 2.3        | 0.455  |
| T 506-2.0 | 50        | 50        | 2.0        | 2.0        | 0.533  |
| T 506-3.2 | 50        | 50        | 3.2        | 3.2        | 0.850  |
| T 506-3.8 | 50        | 50        | 3.8        | 3.8        | 0.997  |
| T 506-4   | 50        | 50        | 4.0        | 4.0        | 1.050  |

| Profil No | a<br>(mm) | b<br>(mm) | s1<br>(mm) | s2<br>(mm) | (kg/m) |
|-----------|-----------|-----------|------------|------------|--------|
| T 506-5   | 50        | 50        | 5.0        | 5.0        | 1.312  |
| T 546-3   | 57        | 20        | 3.0        | 3.0        | 0.615  |
| T 524-1.5 | 60        | 12.5      | 1.5        | 1.5        | 0.290  |
| T 504-1.2 | 60        | 20        | 1.2        | 1.2        | 0.260  |
| T 504-2   | 60        | 20        | 2.0        | 2.0        | 0.430  |
| T 517-2   | 60        | 30        | 2.0        | 2.0        | 0.435  |
| T 517-3   | 60        | 30        | 3.0        | 3.0        | 0.707  |
| T 510-4   | 70        | 50        | 4.0        | 4.0        | 1.270  |
| T 510-4.5 | 70        | 50        | 4.5        | 4.5        | 1.420  |
| T 525-2   | 70        | 70        | 2.0        | 2.0        | 0.750  |
| T 529-5   | 70        | 70        | 5.0        | 5.0        | 1.830  |
| T 511-1.5 | 80        | 20        | 1.5        | 1.5        | 0.380  |
| T 509-2   | 80        | 40        | 2.0        | 2.0        | 0.650  |
| T 509-4   | 80        | 40        | 4.0        | 4.0        | 1.270  |
| T 508-3.2 | 80        | 50        | 3.2        | 3.2        | 1.040  |
| T 508-4   | 80        | 50        | 4.0        | 4.0        | 1.370  |
| T 508-5   | 80        | 50        | 5.0        | 5.0        | 1.700  |
| T 528-1.5 | 85        | 15        | 1.5        | 1.5        | 0.402  |
| T 544-1.3 | 100       | 20        | 1.3        | 1.3        | 0.430  |
| T 512-3   | 100       | 50        | 3.0        | 3.0        | 1.200  |
| T 512-4   | 100       | 50        | 4.0        | 4.0        | 1.525  |
| T 512-4.5 | 100       | 50        | 4.5        | 4.5        | 1.778  |
| T 521-6   | 100       | 100       | 6.0        | 6.0        | 3.170  |
| T 513-3.2 | 120       | 50        | 3.2        | 3.2        | 1.380  |
| T 513-3.7 | 120       | 50        | 3.7        | 3.7        | 1.630  |
| T 513-4   | 120       | 50        | 4.0        | 4.0        | 1.650  |
| T 513-5   | 120       | 50        | 5.0        | 5.0        | 2.250  |
| T 514-4   | 130       | 50        | 4.0        | 4.0        | 1.914  |
| T 514-5   | 130       | 50        | 5.0        | 5.0        | 2.380  |
| T 2262-2  | 150       | 12        | 2.0        | 2.0        | 0.880  |
| T 520-3   | 150       | 50        | 3.0        | 3.0        | 1.600  |
| T 520-4   | 150       | 50        | 4.0        | 4.0        | 2.132  |


# STANDART PROFİLLER

## Tırtıklı L Profiller




| Profil No | a<br>(mm) | b<br>(mm) | s1<br>(mm) | s2<br>(mm) | (kg/m) |
|-----------|-----------|-----------|------------|------------|--------|
| T 2120    | 30        | 40        | 2.0        | 2.0        | 0.360  |
| T 2187    | 40        | 20        | 1.4        | 2.2        | 0.250  |
| T 360-1.8 | 50        | 25        | 1.8        | 1.8        | 0.300  |
| T 360-2   | 50        | 25        | 2.0        | 2.0        | 0.400  |
| T 364-1.8 | 50        | 35        | 1.8        | 1.8        | 0.405  |

## Özel L Profiller




| Profil No | a<br>(mm) | b<br>(mm) | s1<br>(mm) | s2<br>(mm) | (kg/m) |
|-----------|-----------|-----------|------------|------------|--------|
| T 530     | 40        | 30        | 1.2        | 2.0        | 0.310  |
| T 531     | 12.4      | 46.4      | 2.0        | 2.0        | 0.235  |
| T 534     | 55        | 40        | 5.0        | 5.0        | 1.220  |
| T 535-6   | 40        | 80        | 6.0        | 6.0        | 1.856  |
| T 536-6   | 80        | 80        | 6.0        | 6.0        | 2.504  |
| T 545     | 40        | 50        | 2.0        | 2.0        | 0.481  |
| T 713     | 101.1     | 9.8       | 1.8        | 1.5        | 0.526  |

## Standart T Profiller



| Profil No   | a<br>(mm) | b<br>(mm) | s1<br>(mm) | s2<br>(mm) | (kg/m) |
|-------------|-----------|-----------|------------|------------|--------|
| T 401-1.2   | 25        | 25        | 1.2        | 1.2        | 0.160  |
| T 2265-1.25 | 30        | 15        | 1.25       | 1.25       | 0.160  |
| T 400-1.2   | 30        | 30        | 1.2        | 1.2        | 0.195  |
| T 405-2.3   | 40        | 40        | 2.3        | 2.3        | 0.475  |
| T 404-3     | 47        | 25        | 3.0        | 3.0        | 0.565  |
| T 371-1.8   | 50        | 50        | 1.8        | 1.8        | 0.510  |
| T 371-2.0   | 50        | 50        | 2.0        | 2.0        | 0.535  |
| T 350-2.3   | 50        | 50        | 2.3        | 2.3        | 0.612  |
| T 350-3     | 50        | 50        | 3.0        | 3.0        | 0.792  |
| T 327-2     | 50        | 60        | 1.9        | 2.0        | 0.580  |
| T 327-3     | 50        | 60        | 3.0        | 3.0        | 0.880  |
| T 332-A     | 50        | 70        | 2.0        | 2.0        | 0.600  |
| T 326-2.0   | 50        | 100       | 2.0        | 2.0        | 0.815  |
| T 406-2.0   | 80        | 44        | 2.0        | 2.0        | 0.660  |


## Tırtıklı T Profiller



| Profil No  | a<br>(mm) | b<br>(mm) | s1<br>(mm) | s2<br>(mm) | (kg/m) |
|------------|-----------|-----------|------------|------------|--------|
| T 1132-1.5 | 15.5      | 50        | 1.9        | 1.5        | 0.258  |
| T 1142-1.8 | 30        | 70        | 1.8        | 1.7        | 0.446  |
| T 2119-2   | 30        | 90        | 2.0        | 2.0        | 0.610  |
| T 2166-2   | 48        | 95        | 1.8        | 1.8        | 0.580  |
| T 359-1.8  | 50        | 50        | 1.8        | 1.8        | 0.475  |
| T 359-2.0  | 50        | 50        | 2.0        | 2.0        | 0.535  |
| T 332-1.5  | 50        | 70        | 1.5        | 1.5        | 0.494  |
| T 332-1.7  | 50        | 70        | 1.7        | 1.7        | 0.535  |
| T 332-1.8  | 50        | 70        | 1.8        | 1.8        | 0.585  |
| T 332-2    | 50        | 70        | 2.0        | 2.0        | 0.631  |
| T 2203-2   | 50        | 100       | 2.0        | 2.0        | 0.769  |
| T 2211-2   | 45        | 110       | 2.0        | 2.0        | 0.780  |
| T 2216-2   | 50        | 110       | 2.0        | 2.0        | 0.835  |


# STANDART PROFİLLER

## Kutu Profiller




| Profil No | a<br>(mm) | b<br>(mm) | s<br>(mm) | (kg/m) |
|-----------|-----------|-----------|-----------|--------|
| T 1334    | 6         | 20        | 1.1       | 0.155  |
| T 195-3   | 10        | 70        | 3         | 1.246  |
| T 140-1.1 | 10.2      | 18.2      | 1.1       | 0.156  |
| T 130-1.2 | 15        | 25        | 1.2       | 0.250  |
| T 135-1.2 | 15        | 40        | 1.2       | 0.347  |
| T 123-1.2 | 17        | 25        | 1.2       | 0.260  |
| T129-2    | 20        | 20        | 2.0       | 0.390  |
| T 131-1.3 | 20        | 30        | 1.3       | 0.350  |
| T 122-1.1 | 20        | 40        | 1.1       | 0.347  |
| T 122-2   | 20        | 40        | 2.0       | 0.609  |
| T 1266    | 20        | 50        | 0.85      | 0.330  |
| T 128-1.5 | 20        | 50        | 1.5       | 0.480  |
| T 146     | 20        | 60        | 1.3       | 0.545  |
| T 196-1.3 | 20        | 80        | 1.3       | 0.685  |
| T 127-2   | 25        | 25        | 2.0       | 0.500  |
| T 143-2   | 30        | 20        | 2.0       | 0.490  |
| T 142-2   | 30        | 30        | 2.0       | 0.600  |
| T 132-2   | 30        | 50        | 2.0       | 0.826  |
| T 124-1.2 | 32        | 75        | 1.2       | 0.682  |
| T 2823    | 39        | 84        | 4.0       | 2.510  |
| T 121-1.2 | 40        | 40        | 1.2       | 0.506  |
| T 121-2   | 40        | 40        | 2.0       | 0.827  |
| T 121-3   | 40        | 40        | 3.0       | 1.215  |
| T 120-1.2 | 40        | 50        | 1.2       | 0.572  |
| T 120-2   | 40        | 50        | 2.0       | 0.935  |
| T 126-1.5 | 40        | 80        | 1.5       | 0.925  |
| T 126-2   | 40        | 80        | 2.0       | 1.289  |
| T 133-2   | 45        | 45        | 2.0       | 0.950  |
| T 147-2   | 50        | 50        | 2.0       | 0.940  |
| T 147-3   | 50        | 50        | 3.0       | 1.540  |
| T 137-2   | 50        | 60        | 2.0       | 1.179  |
| T 136-2.5 | 50        | 70        | 2.5       | 1.611  |

## Kutu Profiller



| Profil No | a<br>(mm) | b<br>(mm) | s<br>(mm) | (kg/m) |
|-----------|-----------|-----------|-----------|--------|
| T 125-1.5 | 50        | 95        | 1.5       | 1.190  |
| T 134-1.8 | 50        | 100       | 1.8       | 1.435  |
| T 2822    | 50        | 100       | 5.0       | 3.800  |
| T 2830    | 50        | 150       | 2.0       | 2.140  |
| T 138-1.3 | 60        | 60        | 1.3       | 0.838  |
| T 119     | 100       | 100       | 2.0       | 2.125  |

## Kutu Profiller




| Profil No | a<br>(mm) | b<br>(mm) | s<br>(mm) | R<br>(mm) | (kg/m) |
|-----------|-----------|-----------|-----------|-----------|--------|
| T 862     | 14.1      | 14.1      | 2.0       | 1.0       | 0.260  |
| T 149     | 17        | 17        | 1.3       | 1.0       | 0.235  |
| T 194     | 19.75     | 39.85     | 1.0       | 2.0       | 0.320  |
| T 141-1   | 20        | 60        | 2.0       | 2.0       | 0.813  |
| T 1271    | 21.7      | 56.7      | 2.0       | 2.0       | 0.820  |
| T 1267    | 24.9      | 59.9      | 1.2       | 0.6       | 0.550  |
| T 144-3   | 30        | 40        | 3.0       | 0.9       | 1.114  |
| T 145     | 40        | 60        | 1.5       | 1.0       | 0.780  |
| T 2036    | 80        | 100       | 3.0       | 1.0       | 2.835  |
| T 2035    | 100       | 100       | 3.0       | 4.0       | 3.125  |

## Tırtıklı Kutu Profiller

| Profil No | a<br>(mm) | b<br>(mm) | s<br>(mm) | (kg/m) |
|-----------|-----------|-----------|-----------|--------|
| T 197     | 20.5      | 50        | 1.5       | 0.750  |
| T 199     | 40        | 50        | 2.0       | 0.890  |
| T 198     | 50        | 60.5      | 2.5       | 1.458  |


# STANDART PROFİLLER

## U Profiller




| Profil No | a<br>(mm) | b<br>(mm) | s<br>(mm) | (kg/m) |
|-----------|-----------|-----------|-----------|--------|
| T 900-1   | 6.15      | 16.6      | 1.0       | 0.072  |
| T 2708    | 10        | 25        | 1.5       | 0.180  |
| T 453-1.1 | 11.2      | 15.5      | 1.1       | 0.110  |
| T 440     | 11.5      | 40        | 1.5       | 0.246  |
| T 441     | 11.5      | 45        | 1.5       | 0.266  |
| T 451-1.8 | 15        | 11.6      | 1.8       | 0.187  |
| T 339-1.2 | 15        | 22        | 1.2       | 0.160  |
| T 450-1.1 | 17        | 17        | 1.1       | 0.150  |
| T 452-1.2 | 23        | 30        | 1.2       | 0.245  |
| T 457-3   | 30        | 30        | 3.0       | 0.690  |
| T 2579-2  | 30        | 120       | 2.0       | 0.962  |
| T 455-5   | 33        | 65        | 5.0       | 1.650  |
| T 2033    | 40        | 93.4      | 4.0       | 1.805  |
| T 456-5   | 60        | 56.2      | 5.0       | 2.260  |
| T 454-3   | 75        | 41        | 3.0       | 1.520  |

## Boru Profiller



| Profil No | d<br>(mm) | s<br>(mm) | (kg/m) |
|-----------|-----------|-----------|--------|
| T 430     | 15.7      | 1.75      | 0.215  |
| T 429     | 15.7      | 4.85      | 0.455  |
| T 420     | 19        | 1.0       | 0.155  |
| T 491     | 20        | 6.5       | 0.760  |
| T 490     | 24        | 3.0       | 0.550  |
| T 422     | 25        | 1.2       | 0.250  |
| T 423     | 25        | 2.0       | 0.400  |
| T 436     | 25        | 8.75      | 1.211  |
| T 439     | 30        | 1.7       | 0.409  |
| T 434     | 35        | 2.4       | 0.670  |
| T 492     | 30        | 1.5       | 0.380  |
| T 435     | 30        | 3.0       | 0.688  |
| T 437     | 38        | 3.0       | 0.894  |
| T 431     | 40        | 2.0       | 0.660  |
| T 2644    | 41.2      | 2.0       | 0.680  |
| T 438     | 48        | 1.3       | 0.530  |
| T 438     | 48        | 4.0       | 1.500  |
| T 427-1.3 | 49.2      | 1.3       | 0.540  |
| T 433     | 50        | 2.25      | 0.921  |
| T 427-1.5 | 50        | 1.5       | 0.700  |
| T 427-1.8 | 50        | 1.8       | 0.745  |
| T 426-2.5 | 50        | 2.5       | 1.050  |
| T 428     | 54.6      | 2.0       | 0.910  |
| T 2745    | 60        | 15        | 5.750  |
| T 417     | 63        | 1.5       | 0.800  |
| T 2744    | 70        | 10        | 5.110  |
| T 424-4   | 75        | 4.0       | 2.435  |
| T 418     | 80        | 2.0       | 1.340  |
| T 432-2.5 | 88        | 2.5       | 1.830  |
| T 2729    | 100       | 20        | 13.590 |
| T 2746    | 120       | 35        | 25.260 |


## U Profiller



| Profil No | a<br>(mm) | b<br>(mm) | s1<br>(mm) | s2<br>(mm) | (kg/m) |
|-----------|-----------|-----------|------------|------------|--------|
| T 2440    | 10        | 20        | 1.5        | 2.0        | 0.175  |
| T 2438    | 10        | 30        | 1.5        | 2.0        | 0.251  |
| T 447     | 20.6      | 11.8      | 2.0        | 1.3        | 0.195  |
| T 2263    | 22        | 8.0       | 1.1        | 1.1        | 0.160  |
| T 3000    | 30        | 33.5      | 2.0        | 2.5        | 0.523  |


# STANDART PROFİLLER

## Lama Profiller




| Profil No | b<br>(mm) | s<br>(mm) | (kg/m) |
|-----------|-----------|-----------|--------|
| T 462-3   | 20        | 3.0       | 0.165  |
| T 464-4.5 | 20        | 4.5       | 0.245  |
| T 466     | 23        | 3.0       | 0.195  |
| T 2757    | 24        | 1.8       | 0.130  |
| T 2742    | 25        | 1.5       | 0.115  |
| T 465-5   | 25        | 5.0       | 0.340  |
| T 784     | 25        | 10        | 0.682  |
| T 821     | 25.5      | 3.2       | 0.235  |
| T 2741    | 32.5      | 3.0       | 0.280  |
| T 2740    | 35        | 3.0       | 0.300  |
| T 467-2   | 40        | 2.0       | 0.220  |
| T 468-4   | 40        | 4.0       | 0.436  |
| T 469     | 40        | 25        | 2.720  |
| T 460-2   | 45        | 2.0       | 0.250  |
| T 2743    | 50        | 2.0       | 0.285  |
| T 497     | 50        | 3.0       | 0.415  |
| T 487     | 50        | 4.0       | 0.546  |
| T 470     | 50        | 10        | 1.365  |
| T 1053    | 50        | 15        | 2.047  |
| T 471     | 50        | 20        | 2.730  |
| T 472     | 50        | 25        | 3.413  |
| T 461-2   | 60        | 2.0       | 0.326  |
| T 473     | 60        | 10        | 1.632  |
| T 474     | 60        | 20        | 3.264  |
| T 475     | 60        | 30        | 4.900  |
| T 476-4   | 70        | 4.0       | 0.762  |
| T 477-4.5 | 70        | 4.5       | 0.860  |
| T 483     | 80        | 20        | 4.352  |
| T 478     | 80        | 30        | 6.528  |
| T 496     | 100       | 3         | 0.825  |
| T 479     | 100       | 15        | 4.095  |
| T 484     | 100       | 20        | 5.440  |

## Lama Profiller




| Profil No | b<br>(mm) | s<br>(mm) | (kg/m) |
|-----------|-----------|-----------|--------|
| T 485     | 105       | 60        | 17.19  |
| T 486     | 126       | 4.0       | 1.376  |
| T 480-5   | 130       | 5.0       | 1.775  |

## Dolu Kutu Profiller



| Profil No | a<br>(mm) | b<br>(mm) | (kg/m) |
|-----------|-----------|-----------|--------|
| T 444     | 40        | 40        | 4.350  |
| T 481     | 50        | 50        | 6.825  |
| T 482     | 60        | 60        | 9.828  |


## Çubuk Profiller



| Profil No | d<br>(mm) | (kg/m) |
|-----------|-----------|--------|
| T 976     | 12        | 0.309  |
| T 410     | 13        | 0.370  |
| T 411     | 16        | 0.565  |
| T 412     | 20        | 0.855  |
| T 413     | 22        | 1.035  |
| T 414     | 15        | 0.480  |
| T 2645    | 24        | 1.225  |
| T 2646    | 25.5      | 1.380  |
| T 2720    | 70        | 10.415 |


# STANDART PROFİLLER

## Yarım Ay Profiller




| Profil No | d<br>(mm) | (kg/m) |
|-----------|-----------|--------|
| T 977     | 16,8      | 0,300  |

## Elips Profiller




| Profil No | d<br>(mm) | (kg/m) |
|-----------|-----------|--------|
| T 982     | 19,9      | 0,416  |

## Yarım Elips Profiller




| Profil No | d<br>(mm) | (kg/m) |
|-----------|-----------|--------|
| T 983     | 16,2      | 0,337  |


## Özel Profiller




T 458 - 0.187 kg/m

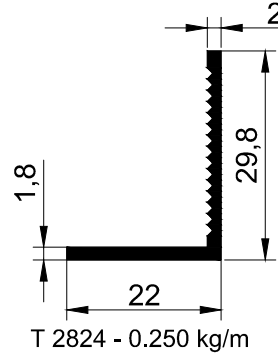


T 2824 - 0.250 kg/m



T 2605 - 0.175 Kg/m




T 2388 - 0.152 kg/m




T 459 - 0.148 kg/m

# STANDART PROFİLLER


## Özel Profiller

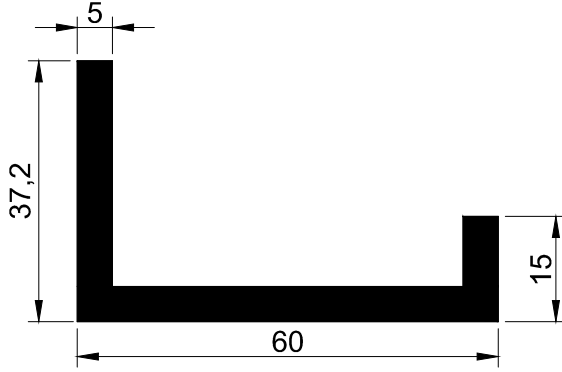


T 2043 - 1.380 kg/m

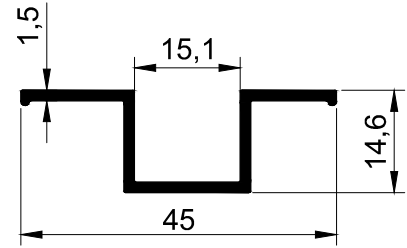


T 2141 - 0.310 kg/m

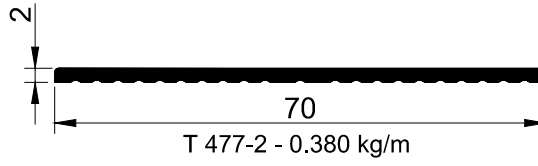

T 477-2 - 0.380 kg/m

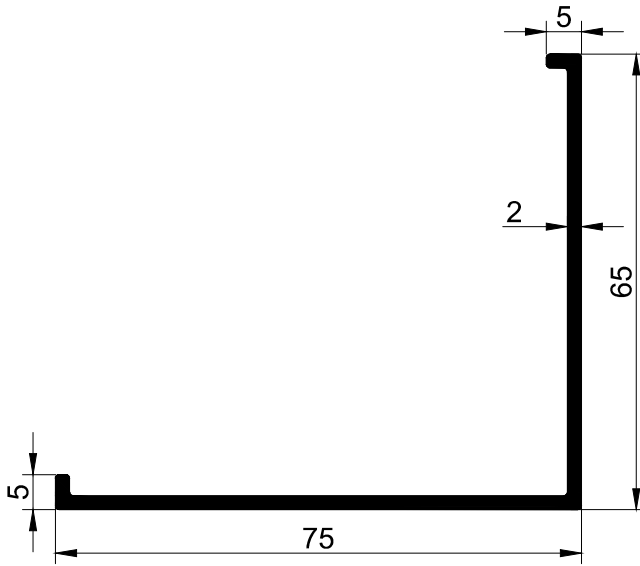

T 542 - 0.790 kg/m

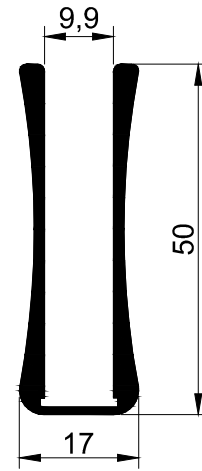

T 2754 - 0.645 kg/m